

# FAST WORKER

Yarı Otomatik Kumaş Serim Makinası  
Semi Automatic Fabric Spreading Machine

## FW1



Otomatik Kesim Aparatı  
Automatic Cutting Device



Power System

### APARATLAR

- ✓ Zikzak aparatı
- ✓ Arka kısırtıcı
- ✓ Hareketli ön kısırtıcı
- ✓ Sallama Aparatı
- ✓ Otomatik Kesim Aparatı
- ✓ Tüp Serim Aparatı

### ATTACHMENTS

- ✓ Zigzag equipment
- ✓ Rear catcher
- ✓ Movable front catcher
- ✓ Flat-fold attachment
- ✓ Automatic cutting device
- ✓ Tubular unit

### 120 KİLOYA KADAR HER TÜRLÜ KUMAŞIN TANSİYONSUZ KENAR HİZALI KOLAY SERİMİ

- ✓ Düşük Likralı dokuma rulo ya da sallama kumaş
- ✓ Düşük Likralı açık en örme rulo ya da sallama kumaş
- ✓ Düşük Likralı rulo ya da sallama tüp kumaş

### SİSTEM ÖZELLİKLERİ


- ✓ Değişen hıza duyarlı elektronik kenar kontrol sistemi
- ✓ Emniyet sensörleri ile tehlike anında otomatik durma
- ✓ İleri, geri gidişlerde farklı hız seçenekleri, zamandan tasarruf
- ✓ Manuel Tansiyon kontrol sistemi
- ✓ Elektronik debriyaj sistemi ile kolay kullanım
- ✓ 4x4 Tahrik sistemi

### SPREADS ALL KINDS OF FABRIC ROLLS WEIGHING UP TO 120 KGS(264 LBS) WITHOUT TENSION AND EDGES ARE ALIGNED PERFECTLY

- ✓ Spreads woven fabrics in roll or flat-folded form (Low Lycra)
- ✓ Spreads knit fabrics in roll or flat-folded form (Low Lycra)
- ✓ Spreads tubular knit fabric in roll or flat-folded form (Low Lycra)

### SYSTEM FEATURES

- ✓ Electronic edge control responsive to variable speed
- ✓ Automatic stop with safety sensors in case of emergency
- ✓ Variable speed control at forward/backward turns «Save Time»
- ✓ Manual tension control system
- ✓ Easy usage with electronic clutch system
- ✓ Four-wheel drive with wheels

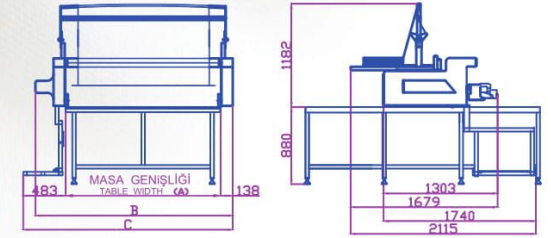

KUMAŞ GENİŞLİĞİ FABRIC WIDTH	A	B	C
1600	1820	2303	2441
1700	1920	2403	2511
1800	2020	2503	2611
1900	2120	2603	2711
2000	2220	2703	2811
2100	2320	2803	2911
2200	2420	2903	3011
2300	2520	3003	3111
2400	2620	3103	3211

Teknik Özellikler		
Kesim aparatı ile maksimum serim yüksekliği	250 mm	
Maksimum zikzak serim yüksekliği	220 mm	
Tüp aparatı ile maksimum serim yüksekliği	200 mm	
Maksimum kumaş top çapı	500 mm	
Maksimum kumaş top ağırlığı	120 Kg	
Maksimum serim hızı (m/dk.)	80 m	
Makine genişlikleri	1600 – 2400 mm	
Serim masası eni	1820 – 2620 mm	
Elektrik bilgileri	2 kW/220 V/50 Hz	

Technical Specifications		
Maximum spreading height with cutting device	250 mm	
Maximum zigzag spreading height	220 mm	
Maximum spreading height with tubular unit	200 mm	
Maximum roll diameter	500 mm	
Maximum roll weight	120 Kg	
Maximum spreading speed (per minute)	80 m	
Fabric width	1600 – 2400 mm	
Table width	1820 – 2620 mm	
Electrical power	2 kW/220 V/50 Hz	

SERKON, has the right to modify the design without prior notice.

