


MN1

MINI MASTER

Tam Otomatik Kumaş Serim Makinası
Fully Automatic Fabric Spreading Machine

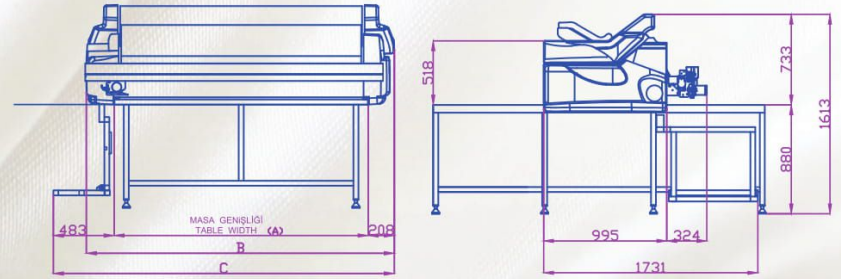

Teknik Özellikler

Kesim aparatı ile maksimum serim yüksekliği	250 mm
Maksimum zikzak serim yüksekliği	220 mm
Tüp aparatı ile maksimum serim yüksekliği	200 mm
Maksimum kumaş top çapı	450 mm
Maksimum kumaş top ağırlığı	120 Kg
Maksimum serim hızı (m/dk.)	100 m
Makine genişlikleri	1600 – 2400 mm
Serim masası eni	1820 – 2620 mm
Elektrik bilgileri	3 kW/220 V/50 Hz

Technical Specifications

Maximum spreading height with cutting device	250 mm
Maximum zigzag spreading height	220 mm
Maximum spreading height with tubular unit	200 mm
Maximum roll diameter	450 mm
Maximum roll weight	120 Kg
Maximum spreading speed (per minute)	100 m
Fabric width	1600 – 2400 mm
Table width	1820 – 2620 mm
Electrical power	3 kW/220 V/50 Hz

KUMAŞ GENİŞLİĞİ FABRIC WIDTH

	A	B	C
1600	1820	2250	2511
1700	1920	2350	2611
1800	2020	2450	2711
1900	2120	2550	2811
2000	2220	2650	2911
2100	2320	2750	3011
2200	2420	2850	3111
2300	2520	2950	3211
2400	2620	3050	3311

MINI MASTER Tam Otomatik Kumaş Serim Makinası Fully Automatic Fabric Spreading Machine

MN1



Zigzag Aparatı
Zigzag Equipment



Otomatik Kesim Aparatı
Automatic Cutting Device



Tüp Aparatı
Tubular Unit



Sallama Aparatı
Flat Fold Attachment



Power System

120 KILOYA KADAR HER TÜRLÜ KUMAŞIN TANSİYONSUZ

KENAR HIZALI KOLAY SERİMİ

- ✓ Dokuma rulo ya da sallama kumaş (Full Likralı)
- ✓ Açık en örme rulo ya da sallama kumaş (Full Likralı)
- ✓ Tüp kumaş rulo ya da sallama (Full Likralı)

PLC KONTROLLÜ DOKUNMATİK EKРАН

- ✓ Öğrenmesi ve eğitimi kolay basitleştirilmiş grafik ekran
- ✓ 50 Farklı kumaş serim ayarının hafızaya alınıp, gerektiğinde tekrar serimi için hafızadan çağırılması
- ✓ Türkçe, İngilizce ve isteğe göre diğer yabancı dil seçenekleri

SİSTEM ÖZELLİKLERİ

- ✓ Değişen hız duyarlı elektronik kenar kontrol sistemi
- ✓ Emniyet sensörleri ile tehlike anında otomatik durma
- ✓ Merdiven kumaş serim özelliği
- ✓ Serim başlangıcı sırasında kumaşın otomatik merkezlenmesi
- ✓ İleri, geri gidişlerde farklı hız seçenekleri, zamandan tasarruf
- ✓ Kumaş bitti otomatik durma özelliği
- ✓ Kat sayıcı
- ✓ Programlanabilir kat uzunluğu ve ilave kumaş verme ayarı

SPREADS ALL KINDS OF FABRIC ROLLS WEIGHING UP TO 120 KGS(264 LBS)

WITHOUT TENSION AND EDGES ARE ALIGNED PERFECTLY

- ✓ Spreads woven fabrics in roll or flat-folded form (Full Lycra)
- ✓ Spreads knit fabrics in roll or flat-folded form (Full Lycra)
- ✓ Spreads tubular knit fabric in roll or flat-folded form (Full Lycra)

LCD TOUCH SCREEN DISPLAY WITH PLC UNIT

- ✓ Simplified graphical display that is easy to learn and easy to train new operators
- ✓ Stores 50 different fabric set up files for quick retrieval to accelerate future spreading jobs
- ✓ Available in Turkish, English and any other foreign languages if requested

MULTI FUNCTION THROTTLE

ENABLES THE OPERATOR TO CONTROL

- ✓ Threading/Rewinding of fabric
- ✓ Start/Stop of spreading with one hand

OPERATOR PLATFORM

- ✓ Allows operator to ride alongside the table

CRADLE FEED SYSTEM PROVIDES

- ✓ Tension-free spreading even difficult fabrics
- ✓ Eliminates use of a fabric roll bar

SYSTEM FEATURES

- ✓ Electronic edge control responsive to variable speed
- ✓ Automatic stop with safety sensors in case of emergency
- ✓ Multi length spreading modes
- ✓ Automatic pre-centering of material beginning during threading
- ✓ Variable speed control at forward/backward turns «Save Time»
- ✓ No cloth stop function
- ✓ Ply counter
- ✓ Programmable lay length and end allowance settings

ATTACHMENTS

- ✓ Zigzag equipment
- ✓ Rear catcher
- ✓ Movable front catcher
- ✓ Fabric roll opener
- ✓ Flat-fold attachment
- ✓ Automatic cutting device
- ✓ Tubular unit
- ✓ Special bar for reverse wound material